

# BSD 300 SB Series

Outlet sockets with 3 outputs TV, Radio and SAT.

**APPLICATION**

Suitable for Digital TV, up to 2300 MHz in individual and community installations.

**CHARACTERISTICS**

- The circuit has a metal (zamak) housing to achieve a high degree of shielding.
- It has a special shielding at the input and output connections, and it is designed for easy installation.
- The outlet's directivity guarantees enough isolation between floors.
- Compatible with most of the electrical devices available.
- Individual box with plastic cover, surface mounting frame and accessories bag.



Frequency (MHz)	5	68	88	108	125	862	950	2300
TV	■				■			
RADIO			■					
SAT								■

MODEL				BSD 301 SB (Final)	BSD 310 SB (Cascade)
Reference				86236	86237
Outputs				3 (TV / FM / SAT)	
Band coverage				5 ÷ 2300 MHz	
DC pass				SAT-IN	SAT-IN / OUT-IN
Through losses				5 - 2300 MHz	
				—	5
Derivation losses	TV	5 - 68 MHz	dB	1	10
	FM	125 - 862 MHz		1,5	10
	SAT	88 - 108 MHz		1	10
		950 - 2300 MHz		2	10
Isolation	FM-TV	5 - 68 MHz	dB	20	
		88 - 108 MHz		20	
		125 - 862 MHz		20	
	FM-SAT	88 - 108 MHz		20	
	TV-SAT	5 - 860 MHz		20	
		950 - 2300 MHz	20		
Output connectors				TV	IEC 9,5 mm (m)
				FM	IEC 9,5 mm (f)
				SAT	F (f)
Packing dimensions (1 unit)				mm	79 x 45 x 8
Packing dimensions (20 unit)				mm	245 x 170 x 170
Packing dimensions (100 unit)				mm	530 x 265 x 36
Weight (20 u.)				Kg	2

# BSD 300 SB Series

## Outlet sockets with 3 outputs TV, Radio and SAT.

### APPLICATION

Suitable for Digital TV, up to 2300 MHz in individual and community installations.

### CHARACTERISTICS

- The circuit has a metal (zamak) housing to achieve a high degree of shielding.
- It has a special shielding at the input and output connections, and it is designed for easy installation.
- The outlet's directivity guarantees enough isolation between floors.
- Compatible with most of the electrical devices available.
- Individual box with plastic cover, surface mounting frame and accessories bag.



Frequency (MHz)	5	68	88	108	125	862	950	2300
TV	■				■			
RADIO			■					
SAT								■

MODEL				BSD 301 SB (Final)	BSD 310 SB (Cascade)
Reference				86236	86237
Outputs				3 (TV / FM / SAT)	
Band coverage	MHz			5 ÷ 2300	
DC pass				SAT-IN	SAT-IN / OUT-IN
Through losses	5 - 2300 MHz			—	5
Derivation losses	TV	5 - 68 MHz	dB	1	10
	FM	125 - 862 MHz		1,5	10
	SAT	88 - 108 MHz		1	10
Isolation	FM-TV	950 - 2300 MHz	dB	2	10
		5 - 68 MHz		20	
		88 - 108 MHz		20	
	FM-SAT	125 - 862 MHz		20	
	TV-SAT	88 - 108 MHz		20	
		5 - 860 MHz	20		
		950 - 2300 MHz	20		
Output connectors	TV	IEC 9,5 mm (m)			
	FM	IEC 9,5 mm (f)			
	SAT	F (f)			
Packing dimensions (1 unit)	mm	79 x 45 x 8			
Packing dimensions (20 unit)	mm	245 x 170 x 170			
Packing dimensions (100 unit)	mm	530 x 265 x 36			
Weight (20 u.)	Kg	2			

# BSD 300 SB Series


**Outlet sockets with 3 outputs TV, Radio and SAT.**

**APPLICATION**

Suitable for Digital TV, up to 2300 MHz in individual and community installations.

**CHARACTERISTICS**

- The circuit has a metal (zamak) housing to achieve a high degree of shielding.
- It has a special shielding at the input and output connections, and it is designed for easy installation.
- The outlet's directivity guarantees enough isolation between floors.
- Compatible with most of the electrical devices available.
- Individual box with plastic cover, surface mounting frame and accessories bag.

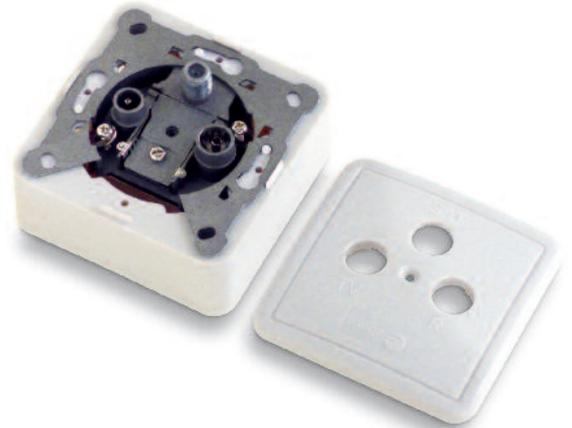

Frequency (MHz)	5	68	88	108	125	862	950	2300
TV	█				█			
RADIO			█					
SAT								█

MODEL				BSD 301 SB (Final)	BSD 310 SB (Cascade)
Reference				86236	86237
Outputs				3 (TV / FM / SAT)	
Band coverage				5 ÷ 2300 MHz	
DC pass				SAT-IN	SAT-IN / OUT-IN
Through losses				5 - 2300 MHz	5
Derivation losses	TV	5 - 68 MHz	dB	1	10
	FM	125 - 862 MHz		1,5	10
	SAT	88 - 108 MHz		1	10
		950 - 2300 MHz		2	10
Isolation	FM-TV	5 - 68 MHz	dB	20	
		88 - 108 MHz		20	
		125 - 862 MHz		20	
	FM-SAT	88 - 108 MHz		20	
	TV-SAT	5 - 860 MHz		20	
		950 - 2300 MHz		20	
Output connectors				TV	IEC 9,5 mm (m)
				FM	IEC 9,5 mm (f)
				SAT	F (f)
Packing dimensions (1 unit)				mm	79 x 45 x 8
Packing dimensions (20 unit)				mm	245 x 170 x 170
Packing dimensions (100 unit)				mm	530 x 265 x 36
Weight (20 u.)				Kg	2

# BSD 300 SB Series


## Outlet sockets with 3 outputs TV, Radio and SAT.

### APPLICATION

Suitable for Digital TV, up to 2300 MHz in individual and community installations.

### CHARACTERISTICS

- The circuit has a metal (zamak) housing to achieve a high degree of shielding.
- It has a special shielding at the input and output connections, and it is designed for easy installation.
- The outlet's directivity guarantees enough isolation between floors.
- Compatible with most of the electrical devices available.
- Individual box with plastic cover, surface mounting frame and accessories bag.

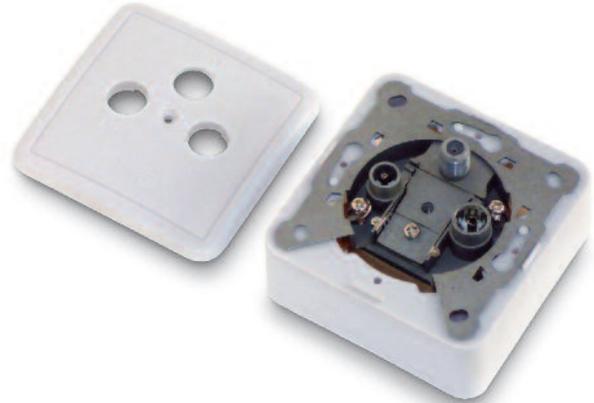

Frequency (MHz)	5	68	88	108	125	862	950	2300
TV	■				■			
RADIO			■					
SAT								■

MODEL				BSD 301 SB (Final)	BSD 310 SB (Cascade)
Reference				86236	86237
Outputs				3 (TV / FM / SAT)	
Band coverage				5 ÷ 2300 MHz	
DC pass				SAT-IN	SAT-IN / OUT-IN
Through losses				5 - 2300 MHz	
				—	5
Derivation losses	TV	5 - 68 MHz	dB	1	10
	FM	125 - 862 MHz		1,5	10
	SAT	88 - 108 MHz		1	10
				2	10
Isolation	FM-TV	5 - 68 MHz	dB	20	
		88 - 108 MHz		20	
		125 - 862 MHz		20	
	FM-SAT	88 - 108 MHz		20	
	TV-SAT	5 - 860 MHz		20	
				20	
Output connectors				TV	IEC 9,5 mm (m)
				FM	IEC 9,5 mm (f)
				SAT	F (f)
Packing dimensions (1 unit)				mm	79 x 45 x 8
Packing dimensions (20 unit)				mm	245 x 170 x 170
Packing dimensions (100 unit)				mm	530 x 265 x 36
Weight (20 u.)				Kg	2